

SPECIFICATION FOR APPROVAL

LED POWER SUPPLY

CUSTOMER :

DESCRIPTION : Input:220~240V AC 50/60Hz

Output:24VDC 6.25A

OUR MODEL NO : MLED-24V150W-IP67

SAMPLE COLOR : Black () White ()

SALES:

APPROVED BY:

Rev.List:

Rev:A0	Date:2023-11-27	Description: New Rev	Design: Wang
Rev:	Date:	/Description:	Design:
Rev:	Date:	Description:	Design:
Rev:	Date:	Description:	Design:

Table of contents

- 1、 DESCRIPTION
- 2、 ELECTRICAL SPECIFICATIONS
- 3、 IP Grade
- 4、 MECHANICAL REQUIREMENT
- 5、 WIRE GAUGE AND FORM FACTOR
- 6、 LABEL
- 7、 包 PACKING

1、 Scope description

This product for the LED driver , the product operational factors is the constant voltage model

2、 Electrical specifications

类别	Item	Technical Norm
	Max. Output Wattage	150W
Input	Rated input voltage	220-240VAC
	Range of input voltage	198-264VAC
	Frequency(Hz)	50/60Hz
	Power Factor	≥0.9 @Full Load 220-240VAC
	Current	0.9A MAX. @Full Load , 220-240VAC
	Start-up time	< 1S for ERP @Full Load
	Unload Power Consumption	≤0.5W
Output	Unload voltage	25.2VDC MAX.
	Load Voltage rang	22.8-25.2VDC
	Constant Voltage	24V
	Voltage Accuracy	±5% @220-240VAC
	Voltage Regulation	≤5%@Full Load
	Hold-up Time	NA
	Efficiency in full load	≥89.00%@Full Load ,230VAC/50HZ
Ripple	< 400mVp-p @Full Load , 220-240VAC	
Measured methods:	Output in parallel with a 0.1uf ceramic chip capacitor and a 10uf electrolytic capacitor Measured using a 20MHz bandwidth	
Protection	Over Load Protection	Protection type: Auto Restore
	Over Voltage Protection	Protection type: Auto Restore
	Short circuit Protection	Protection type: Auto Restore
	Over Temperature protection	Protection type: Auto Restore

Hi-pot	Input-Output(V.AC)	3000V/5mA/1min
	Input-FG(V.AC)	NA
	Output-FG(V.AC)	NA
Isolation resistance	Input-Output(V.AC)	$\geq 100M\Omega @ 500VDC$
	Input-FG(V.AC)	NA
	Output-FG(V.AC)	NA
Environment/ Life span	Operating Temperature	-20°C...45°C
	tc	85°C
	Storage Temperature	-40°C...80°C
	Humidity	20%-90%RH
	Life time	30,000h @230V@Ta20-45°C
	HSF requirement	RoHS
feature	Dimension (LXWXH)	193*68*37 (L * W * H)mm
Safety & EMC	Approval	CE
	Safety standards	EN 61347-2-13:2014 EN 61347-2-13: 2014/A1:2017 EN 61347-1:2015 EN 61347-1:2015/A1:2021 EN 60598-1:2015 EN 60598-1:2015/A1:2018
	EMI	EN IEC 55015:2019+A11:2020 EN 61547:2009 EN IEC 61000-3-2:2019+A1:2021 EN 61000-3-3:20139+A1:2019+A2:2021
Note	All parameters NOT specially mentioned are measured at rated input or max rated input , and 25°C of ambient temperature	

3、 IP Grade: IP67

4、 MECHANICAL REQUIREMENT:

4.1 Enclosure: The power supply size: L193x 68 x H37mm;

LEDprofiles s.r.o.

www.ledprofiles.sk





Date:2023.11.27

Page code 4/7


5、 Wire gauge and form factor -

:


AC Input	PVC 2*1.0mm ²	0.2m
DC Output	PVC 2*1.0mm ²	0.2m

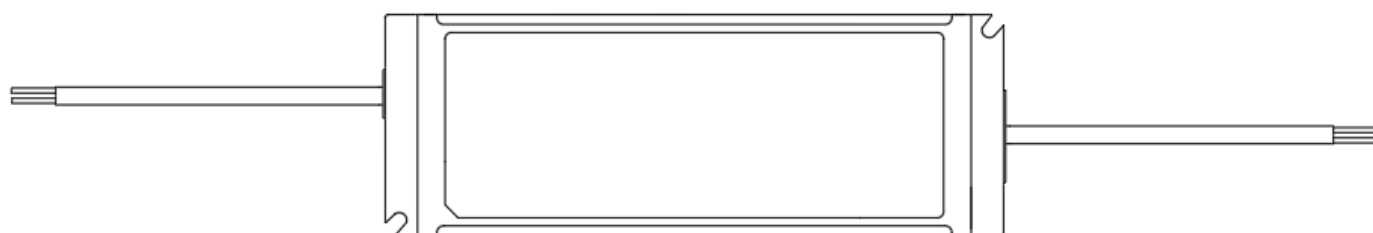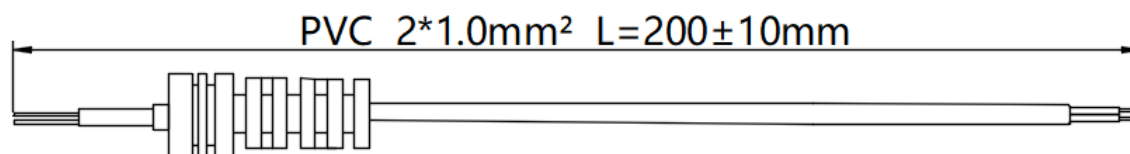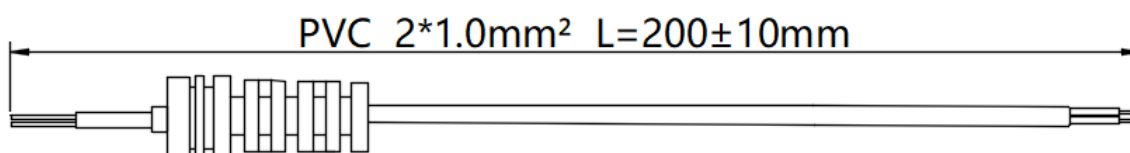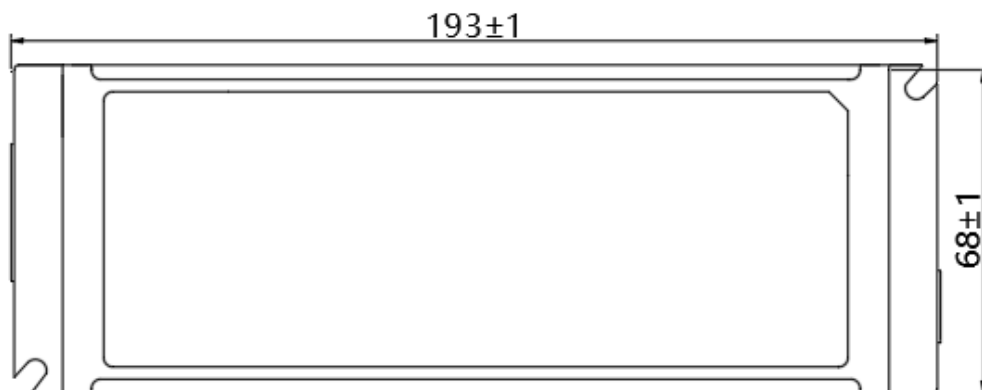

6、 LABEL :

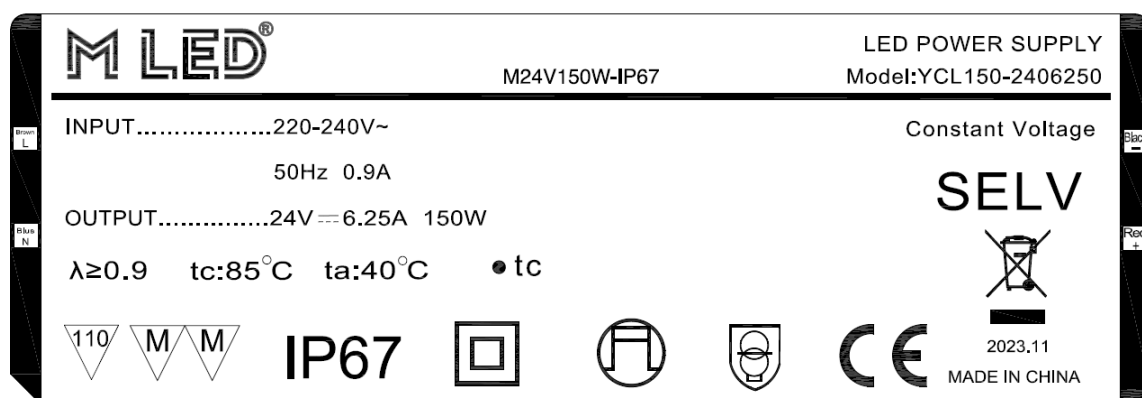

7. PACKING

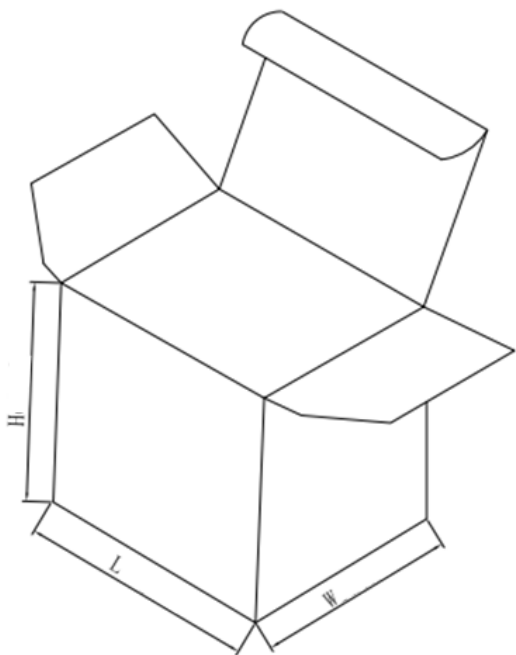


Inner box:

Length:250mm

Width:80mm

Height:45mm

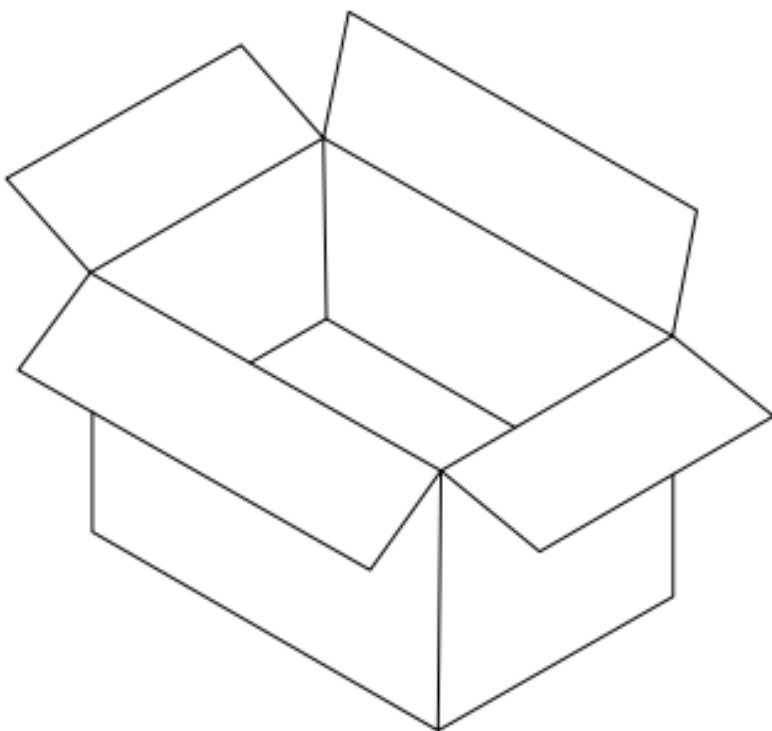

Outside box:

340L*270W*245H (mm)

Quantity:20PCS